



**PCT**


WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> : H04Q		A2	(11) International Publication Number: WO 00/69180
			(43) International Publication Date: 16 November 2000 (16.11.00)
(21) International Application Number: PCT/US00/12654			(81) Designated States: AU, CA, JP, KR, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  Published <i>Without international search report and to be republished upon receipt of that report.</i>
(22) International Filing Date: 8 May 2000 (08.05.00)			
(30) Priority Data: 60/133,189 7 May 1999 (07.05.99) US			
(71) Applicant: LCI COMPUTER GROUP, N.V. [US/US]; 952 Beacon Street, Newton, MA 02159 (US).			
(72) Inventor: DESCHRIJVER, Steffan; 952 Beacon Street, Newton, MA 02159 (US).			
(74) Agents: KELLY, Edward, J. et al.; Foley, Hoag & Eliot, LLP, One Post Office Square, Boston, MA 02109 (US).			

**BEST AVAILABLE COPY**

(54) Title: SYSTEMS AND METHODS FOR ADVERTISING THROUGH A WIRELESS DEVICE

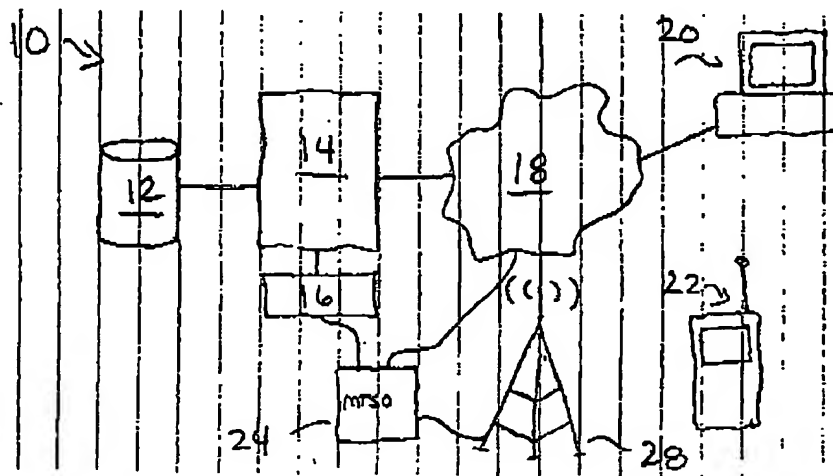

**(57) Abstract**

The systems and methods allow a wireless device user to receive phone numbers representative of businesses, persons and places from which the user can purchase goods and services. As described herein these systems allow a wireless device user, typically a wireless device user entering a geographic region that is less familiar to that user, to call into a central number where the user can employ the wireless device to request information including the phone numbers of local merchants, taxi services, restaurants, hotels, airlines, and other such information to be downloaded to the programmable memory of the wireless device and programmed into the wireless device. Typically, as described herein the phone numbers are programmed into the wireless device programmable memory as speed dial numbers that the user can access for contacting providers of the desired goods and services.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MY	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

WO 00/69180

PCT/US00/12654

## SYSTEMS AND METHODS FOR ADVERTISING THROUGH A WIRELESS DEVICE

### 5 REFERENCE TO RELATED APPLICATIONS

This application claims priority to USSN 60/ 133, 189 filed 7 MAY 1999, entitled APPARATUS AND PROCESS FOR INTERACTION AND CONTACT BETWEEN BUSINESS AND CLIENT, and naming STEFAAN DE SCHRIJVER as inventor.

10

### Field of the Invention

The invention relates to systems and methods for allowing business and other entities to deliver advertising to a customer employing a wireless hand held device.

15

### Background of the Invention

Today there are applications in place that allow wireless device users to access data stored through the Internet. Specifically, the wireless application protocol is a protocol, or a set of rules, that allows a wireless device to access the Internet, including the World Wide Web. In many ways WAP is equivalent to TCP/IP, the Internet suite of protocols that allows a computer or server to access the Internet. WAP was set in motion by Motorola, Nokia, Erikson and other back in 1997 with the founding of the WAP forum. Since the establishment of that forum, browsers have been developed that may operate on wireless devices, such as wireless handset phones, which allow wireless users to access appropriately formatted data on the Internet.

The popularity of services that allows wireless devices to access Internet data continues to grow. In part it is this growing popularity that has motivated wireless network providers to increase bandwidth at which data may be exchanged between a wireless network

WO 00/69180

PCT/US00/12654

- 5 and a wireless device. In fact today, GSM is close to 16k bps. Accordingly, meaningful data transmissions between a wireless device and a server on the Internet is becoming a reality.

With the improved underlying platform for supporting wireless data transfers of Internet data, many existing web services are now become web enabled. Specifically,  
10 existing web services such as Yahoo or the Dow Jones Online, are now providing information such as stock prices, and services, such as search engine capabilities, in a format that may be readily accessed and employed by a wireless device. Accordingly, today there is a significant effort underway to rewrite and modify existing web services to provide hand-held wireless device users with access to information and services provided by the Internet.

15

Additionally, new services are being developed on the Internet that are primarily tailored to servicing wireless device users. For example, today's systems are being developed that will allows a wireless handset user to access calendar data, contact lists, and other types of data commonly associated with a personal digital assistant. Accordingly, a wireless  
20 device user may employ their wireless device, such as a cell phone, to access a web service that can provide all the information and services commonly provided by a PDA such as the Palm Pilot. In this way the wireless device user may employ their handset both as a voice communication device and as a computing platform, such as a PDA.

25 However, although existing Internet services are now being rewritten and modified to allow access through wireless devices, and although new services and applications are being developed that use server side processing to extend the use of a wireless device, there is still a need for systems that will allow users to leverage the Internet infrastructure to more efficiently use their wireless device. For example, there is a need for services that are  
30 deployed over the Internet and accessible through a wireless device which will allow a user to more effectively use the traditional modes of operation of a hand-set device. For example, a wireless device use that roams into a remote location, is largely dependent upon the local telephone information service to get phone number for people and companies that the user wishes to contact within that remote location. Although the wireless infrastructure provides  
35 excellent information directory services, such systems are not well prepared to leverage the

WO 00/69180

PCT/US00/12654

- 5 strength of the Internet and to provide more efficiently information that is likely to be of use to the roaming wireless device user.

Accordingly, there is a need in the art for systems and services that will support a wireless device user to aid the user in more efficiently employing their wireless device.

10

### Summary of the Invention

- More particularly, the systems and methods described herein allow for advertising over a wireless network. Such systems may comprise a wireless device that has a
- 15 programmable memory for storing telephone numbers, and a web site portal that will have a database storing a plurality of data records. Each data record may have storage for a telephone number and each data record may be associated with a category of goods or services. The web site portal may also have an interface for allowing a company, or any provider of a good or service, to select one of the categories of goods or services and to
- 20 upload to the data record associated with the selected category a phone number and a data message for storage in the associated data record. Additionally, the systems may include a computer process for allowing the programmable wireless device to request data from the website portal and, in response to the request, select at least one of the categories of goods or services. The computer process may also program a phone number into the programmable
- 25 memory of the wireless device, typically as a speed dial number, for allowing a wireless device to contact the provider of the selected good or service.

- The systems and methods described herein may also include mechanisms that allow for delivery to the wireless device a program for programming the phone number into the
- 30 programmable memory. The number programmed into the programmable memory may be representative of the phone number provided by the company or other provider or good or service, or may optionally be a phone number associated with a central telephone server that may process information provided by the wireless device to determine a phone number to which the wireless user may be forwarded and which will connect the wireless device user to
- 35 the provider of the good or service.

WO 00/69180

PCT/US00/12654

5

In one particular embodiment, the systems and methods described herein include a web site portal that allows a company to upload to the web site portal server a banner add that can be associated with a phone number for that provider of goods and services. The banner add can be a conventional banner add and the web site portal server may include a resizing process that will process the banner ad to resize the add for presentation on a wireless device.

In a further embodiment the systems described herein include mechanisms for collecting location information that may be associated with the wireless device and for processing the location information for selecting a phone number. For example, in one practice the web site portal may be provided with a signal representative of the geographic location of a cellular tower supporting the transmission of data to the wireless network. The server may process this information to determine the geographic location of the wireless device and may select phone numbers that are relevant to that location. In one embodiment this geographic information is employed for selecting between a plurality of different phone numbers wherein a phone number relevant to the determined geographic location of the wireless device is provided to the wireless device.

In a further practice, the wireless device may include a virtual machine that may be programmed for storing information within the speed dial memory of the wireless device. In one embodiment the virtual machine runs WML scripts or WML compatible scripts. Optionally, the scripts may include a security mechanism that requires the users authorization before programming the wireless device number into the programmable memory. The security mechanism may include a password verification mechanism, a biometric passkey mechanism or any other suitable mechanism for verifying the identity, and/or authority of the user authorizing that the programmable memory of the wireless device be accessed by the script, or by the web site portal.

In a further embodiment, the advertising information and phone number provided by a provider of a good or service may be part of a package of such numbers and ads that may be presented as a group to the user. These groups of ads may be centered around themes such as

WO 00/69180

PCT/US00/12654

5 tourism, business travel, and other such themes. Accordingly a wireless device user entering a remote geographical location about which the user has little information, may access the web site portal to have delivered to the wireless device information and phone numbers for local taxi services, airlines, hotels, and other such goods and services.

10 Other objects of the invention will, in part, be obvious, and, in part, be shown from the following description of the systems and methods shown herein.

#### Brief Description of the Drawings

15

The foregoing and other objects and advantages of the invention will be appreciated more fully from the following further description thereof, with reference to the accompanying drawings wherein;

20 Figure 1 depicts one system according to the invention;

Figure 2 depicts in more detail a web server system that may deliver web pages and scripts that may be process by a wireless device;

25 Figure 3 depicts a flow chart diagram of how a company accesses the web site portal and uploads information to that portal;

Figure 4 depicts a flow chart representation of one process for a web server to create a  
30 local advertising package; and

Figure 5 presents a flow chart diagram of one process wherein a wireless device user calls in and receives information from a portal.

35

WO 00/69180

PCT/US00/12654

5 **Description of the Illustrated Embodiments**

To provide an overall understanding of the invention, certain illustrative embodiments will now be described, including a system that allows for local advertising over a wireless telephone device. However, it will be understood by one of ordinary skill in the art that the  
10 systems and methods described herein can be adapted and modified for other suitable applications and that such other additions and modifications will not depart from the scope hereof.

The systems and methods described herein include systems that allow for local  
15 advertising through wireless communication devices, such as cellular phones equipped for communicating via the wireless application protocol (WAP). For example, the systems described herein include systems wherein a user having a wireless device that can exchange data via the WAP and that includes a programmable memory that may be employed for storing telephone numbers including portions of a programmable memory that can store  
20 telephone numbers which may be speed dialed by manipulating the keypad of the wireless device. As described in certain illustrated embodiments herein, a user having such a wireless device may roam into a geographic location, such as another part of the country, that the user is unfamiliar with. Employing the systems described herein, local merchants may access a WAP portal and upload to that portal banner ads and phone number associated with those  
25 merchants. Each of the banner ads and phone number may be associated with a category of products or services that are provided by respective ones of the merchants. The WAP portal may be a conventional web site that allows merchants to upload the information via a HTML form. The portal server may process the information collected through the form and create a data record that may be stored in a database optionally maintained by the portal. An ad server  
30 may also be present at the portal to respond to requests from wireless device users to download information about regional services available to the user. To this end the web portal may allow wireless devices to call in to the portal, wherein the call will be processed by the portal to determine the geographic location of the wireless device and any interests such as tourism or business travel offered by the user of the wireless device. The ad server  
35 may select one or more ads and associated phone numbers for delivery to the wireless device.



WO 00/69180

FCT/US00/12654

5 Optionally, the web server may deliver the ads and telephone numbers to the wireless device and may further deliver an executable script that can program the speed dial memory of the wireless device. Accordingly, after having called into the portal, the wireless device user can receive from the portal a plurality of telephone numbers each associated with the region from which the user made the call and each representative of goods or services, such as taxis,  
10 airlines, hotels, and other such information that is of interest to the user.

This invention relates to a system that would allow a programmable memory in a device, such as for example a cellular phone, a smartcard, a smartpen, a conventional computer keyboard, or any suitable system that has a programmable memory to be accessed  
15 and programmed by vendors that are interested in inserting into slots within the memory advertising information such as advertising banners. In one embodiment, the system would provide for cellular phone systems wherein advertisers can pay to insert into the programmable memory of the cellular phone advertising banners, telephone numbers, or other such information useful to the company such that a user is provided with a programmed  
20 memory that includes advertising information. For example, a cellular phone can be programmed with a set of speed dial codes wherein the speed dial codes have been provided, and paid for by a company. For example, the Hertz Company can pay for downloading a speed dial number for the local Hertz Rent-A-Car Agency. Therefore, when the phone user wishes to access a rental car, the user merely needs to depress the buttons to access the  
25 programmable speed dial codes within his phone to automatically call a rental car company. In this case, as Hertz has paid for the right to insert their data into the programmable memory, the phone would dial the number provided by Hertz. Optionally, the screen of the cellular phone could display a banner indicating that the phone is dialing the Hertz Rent-A-Car Agency.

30 In one embodiment, a user can dial a phone number and optionally address series of digits identifying the user's preferences or other information and then can hang up. A server can call back to the phone company and download to the phone company information necessary for changing the programmable memory of the system as desired by advertisers  
35 who have purchased memory space within the user's phone. Optionally, the system can be

WO 00/69180

PCT/US00/12654

5 made secure by having someone enter passwords, biometric data, or electronic signatures.

In a further embodiment, the phone is equipped with IRDA, or blue tooth input path that can be accessed by, for example, a computer system for programming the memory of the cellular phone as desired by advertisers.

10

In a further aspect, it will be understood that the invention includes both business methods for providing franchises for subscribing local advertisers, such as for a certain area code, and providing a server site that can download the information to users that subscribe to the service. Similarly, the system can be understood as server systems that provide for  
15 downloading such information to a user's programmable memory device, such as their PDA or cellular phone.

More specifically, Figure 1 depicts one system 10 that allows a wireless device user to access a platform that can deliver into the programmable memory of the wireless device a set  
20 of telephone numbers that the user may employ for accessing goods and services from local merchants. More specifically, Figure 1 depicts a system 10 wherein a database 12 couples to a server 14. The server 14 couples to a branch exchange 16 and to the Internet 18. The branch exchange 16 couples to a cellular switch 24 and to a broadcast unit 28. The broadcast unit 28 may exchange data with the wireless device 22 and the Internet 18 may exchange data  
25 with the client system 20.

Generally, the server 14 may be a WAP compatible web site that allows local merchants, or other providers of goods and services to employ the client 20 to access the server 14 through the Internet 18. The server 14 may include a web server, such as the  
30 Apache web server, that will monitor requests coming in from the Internet 18 and direct it to the IP address of the server 14. Accordingly, a request by a user through client 20 may be detected by the server 14 and a web page may be delivered by the server 14 to the client 20 via the Internet. The web page delivered to the client 20 may include an HTML form that provides data entry fields that a merchant may complete to upload data to the server 14.  
35 Accordingly, Figure 1 depicts that the server 14 and the client 20 may communicate via the

WO 00/69180

PCT/US00/12654

- 5 Internet 18 according to conventional techniques for exchanging information between a client system such as the client 20 and a server, such as the depicted server 14.

Figure 1 further depicts that the server 14 may also communicate via the Internet 18 to the cellular switch 24 and the broadcast system 28. Accordingly, the server 14 may employ  
10 the Internet 18 and the cellular or wireless infrastructure depicted by the switch 24 and station 28 to transmit data according to the Internet protocol to the wireless device client 22. The wireless device client 22 may be in one embodiment a wireless telephone, such as a GSM phone, that includes a programmable memory and a browser application, such as the UP.Browser available from Phone.com. Accordingly, the server 14 and the wireless  
15 communication device 22 may communicate via the Internet 18 to exchange information between the server and the wireless device 22.

Additionally, Figure 1 also shows that the server 14 further connects to an optional branch exchange 16. The branch exchange 16 may be a conventional switch system for  
20 coupling the server 14 to the public switching telephone network (PSTN). Such exchanges are available from Lucent technologies and Nortel Networks. As further depicted in Figure 1 the branch exchange 16 couples via a communication path, such as the telephone lines of the PSTN, to the cellular switch 24. The cellular switch 24 connects to the broadcast system 28 for communicating with the wireless device 22. Accordingly, Figure 1 further depicts that the  
25 server 14 and the wireless device 22 may exchange information via the cellular network and the PSTN.

Turning now the elements that compose the system 10 depicted in Fig 1, it can be seen the system 10 includes a network based system that includes a plurality of client systems  
30 20 and 22 that connect through a network 18, such as the Internet IP network, or any suitable network to a server system, such as the server system 14 depicted in Figure 1. The server 14 may connect over dedicated channels, over the Internet, or by other means, to the client systems 20 and 22. Preferably the servers selected for its proximity to a major Internet node, such as the MAE-EAST Internet exchange.

35

WO 00/69180

PCT/US00/12654

5

For the depicted system 10, the client systems 20 and 22 may be any suitable computer system such as a PC workstation, a handheld computing device, a wireless communication device, such as a cellular phone having a programmable memory, or any other such device, equipped with a network client capable of accessing a network server and  
10 interacting with the server to exchange information with the server. In one embodiment, the network client is a web client, such as a web browser that may include the Netscape web browser, the Microsoft Internet explorer web browser, the mini-browser from phone.com, the Lynx web browser, or a proprietary web browser, or web client that allows the user to exchange data with a web server, and ftp server, a gopher server, or some other type of  
15 network server.

Optionally, the client and the server rely on an unsecured communication path, such as the Internet, for accessing services on the remote server. To add security to such a communication path, the client and the server may employ a security system, such as any of  
20 the conventional security systems that have been developed to provide to the remote user a secured channel for transmitting data over the Internet. One such system is the Netscape secured socket layer (SSL) security mechanism that provides to a remote user a trusted path between a conventional web browser program and a web server. Therefore, optionally and preferably, the client systems 20 and 22 and the server system 14 have built in 128 bit or 40  
25 bit SSL capability and may establish an SSL communication channel between the clients and the server 14. Additionally, a specification called WTLS also implements options for authentication and encryption and is adapted for use in the mobile environment. Other security systems may be employed, such as those described in Bruce Schneir, *Applied Cryptography* (Addison-Wesley 1996). Alternatively, the systems may employ, at least in  
30 part, secure communication paths for transferring information between the server and the client. For purpose of illustration however, the systems described herein, including the system 10 depicted in Fig. 1 will be understood to employ a public channel, such as an Internet connection through an ISP or any suitable connection, to connect the subscriber systems 20 and 22 and the server 14.

35

WO 00/69180

PCT/US00/12654

5           The server 14 may be supported by a commercially available server platform such as a Sun Sparc™ system running a version of the Unix operating system and running a server capable of connecting with, or exchanging data with, one of the subscriber systems 20 and 22. In the embodiment of Fig. 1, the server 14 includes a web server, such as the Apache web server or any suitable web server. The web server component of the server 14 acts to listen  
10   for requests from subscriber systems 20 and 22, and in response to such a request, resolves the request to identify a filename, script, dynamically generated data that may be associated with that request and to return the identified data to the requesting subscriber system. The operation of the web server component of server 14 may be understood more fully from Laurie et al., Apache The Definitive Guide, O'Reilly Press (1997); and Jamsa, *Internet*  
15   *Programming*, Jamsa Press (1995), the teachings of which are herein incorporated by reference. The server 14 may also include components that extend its operation to accomplish the integrated financial transactions described herein, and the architecture of the server 14 may vary according to the application. For example, the web server may have built in extensions, typically referred to as modules, to allow the server 14 to perform operations  
20   that facilitate the data transfer transactions desired by a subscriber, or the web server may have access to a directory of executable files, each of which files may be employed for performing the operations, or parts of the operations, that implement the integrated financial transactions of the subscriber.

25           The server 14 may couple to a database 12 that stores information representative of data records for delivery to a client system. The data records may include storage for the telephone number, ad banner, url, directions, and other information uploaded by the local merchant. The depicted database 12 may comprise any suitable database system, including the commercially available Microsoft Access database, and may be a local or distributed  
30   database system. The design and development of database systems suitable for use with the system 10, follow from principles known in the art, including those described in McGovern et al., *A Guide To Sybase and SQL Server*, Addison-Wesley (1993); and Yarger et al. *MySQL & mSQL* O'Reilly (1999). The database 12 may be supported by any suitable persistent data memory, such as a hard disk drive, RAID system, tape drive system, floppy diskette, or any  
35   other suitable system. The system 10 depicted in Figure 1 includes a database device 12 that

WO 00/69180

PCT/US00/12654

5 is separate from the server station platform 14, however, it will be understood by those of ordinary skill in the art that in other embodiments the database device 16 may be integrated into the server 14. Additionally, as the systems and methods described herein allow for franchises to be established that allow for supporting the advertising activities of local merchants, it will be understood that a plurality of systems, such as the depicted system 10  
10 may be provided over the Internet infrastructure, and such system may optionally comprise a distributed database.

Figure 2 depicts in greater detail the server system 14 depicted in Figure 1. Specifically, Figure 2 depicts that the server 14 may include a web server 38, scripts 42 and  
15 44, web documents, such as WML documents 48 and client scripts 50 such as WML scripts.

Generally Figure 2 depicts that the server 14 includes a web server 38, that may access a directory or library of executable code. The executable code, such as the depicted scripts 42 and 44, may be employed by the server 14 for implementing the transactions of the  
20 system 10 that allow local merchants to upload advertising information into the database 12 so that data records get created and stored within the database 12. These data records may include the phone number of the local merchants, a URL to a website associated with the merchant, and other data such as directions to the merchants place of business, the phone number for the merchant, and other such information. One example of a data record is  
25 presented below.

30

DATA RECORD
Banner ad
Telephone Number
Description for Number
Note

Additionally, the scripts 42 may store with the server 12 an executable script, such as a WML script that may execute on a virtual machine that may optionally be present on the

WO 00/69180

PCT/US00/12654

- 5 wireless device 22. As will be described hereinafter the scripts may be employed for  
executing telephony applications on the wireless device 22.

In one embodiment, the server 38 is configured for operating according to the WAP.  
To this end, the server 38 may be configured to serve static WML or HDML. The  
10 modifications for adjusting the operation of the web server to server WAP compliant  
applications are well known in the art, and include adding the an entry to the web server's  
MIME configuration table that includes:

15

File Extension	MIME Type
.wml	text/vnd.wap.wml
.wmls	text/vnd.wap.wmlscript
.hdml	text/x-hdml
.bmp	image/bmp

20

Additionally, for Dynamic content, the web server 38 may be configured as is known in  
the art to output the appropriate Content-type HTTP response header string, and the method  
for implementing this will vary depending on the computing environment. Conventional  
25 programming languages (e.g. Perl) direct that you print the actual Content-type header string  
at the beginning of the output, while scripting environments (e.g. Cold Fusion) usually  
provide tags to control this at a higher level. One examples includes:

- Perl: Print the HTTP response header string, followed by a blank line before printing a  
WML deck:  
30 print "Content-type: text/vnd.wap.wml\n\n";  
print \$DECK;

Additionally, in an optional embodiment, the server 38 employs WAP v1.1 which is  
understood to include an optional specification known as WTA (Wireless Telephony  
35 Applications). This is understood to allow incoming and outgoing calls to be handled within  
WML and WMLScript, permitting trusted parties such as network operators to deploy  
combined voice call and Internet services in an easily programmable way, in conjunction with

WO 00/69180

PCT/US00/12654

5 a network WTA server. Example uses are automatically calling a number found in a yellow  
pages search, and visual interfaces to voicemail systems. For the systems and methods at  
hand, this allows scripts, such as the script 50 to be downloaded to the wireless device for  
programming the device memory with content, including telephone numbers, delivered from  
the server 14. Accordingly, for wireless devices that include a virtual machine, similar to the  
10 Java virtual machine, the systems described herein may deliver content that can be executed  
within the virtual machine.

The design and development of such systems follow from principles known in the art  
including those described in the software development kit provided by Phone.com of  
15 Redwood City CA, that enables Web developers to create HDML and WML information  
services and applications. The SDK includes a simulator that simulates the behavior of an  
UP.Browser-enabled device. The simulator can run applications in local mode or connect to  
an UP.Link to test the UP.Link-enabled services and APTs. Phone.com also provides a  
UP.Link for developers to use so that they can create applications without the need for a  
20 handset or expensive carrier infrastructure. The simulator runs on either Windows '95 or  
Windows NT. Also included is a set of UP.Link developer documentation; sample files and  
example source code; and libraries of Perl, C and COM Object functions, which describe the  
process of generating WML or HDML and handling HTTP requests.

25 Additionally, the scripts 42 and 44 as well as other scripts that may be present on the  
server 14 may also be employed for allowing the wireless device 22 to access the server 14  
through the web server interface 38 or optionally through the branch exchange 16 and to  
request information, such as the phone numbers of local service and good providers. To this  
end the scripts may execute on the server platform 14 to collect information from the database  
30 12 and to format that information into a format suitable for delivery to the particular type of  
wireless device 22 that requested the information. The information may then be downloaded  
to the wireless client 22 either through the Internet interface or through the PSTN via the  
branch exchange 16. In either practice, the wireless device 22 may be programmed to include  
the information requested by the wireless device.

35



WO 00/69180

PCT/US00/12654

5           Optionally, additional scripts may be provided which would allow a wireless device user to use a traditional desktop client such as the depicted desktop client 20. By using the desktop client 20 the wireless device user may use the more efficient data entry devices of the client 20, such as the superior keyboard and mouse that are typically part of a desktop system to select different content that may be uploaded by the user to the database 12 and later  
10   retrieved by the user through their wireless device 22 wherein they access the portal supported by the server 14 to collect from the portal those phone number, ads, and other information that they had earlier selected while operating the desktop client 20.

          As can be seen from Fig. 2, the server 14 acts as middleware that coordinates the  
15   operations of the merchant as it uploads information into the database 12 and the operations of the client as it retrieves information from the database 12. Specifically, the server 14 is as a functional block diagram that includes a web server 40, a directory of web pages 48, scripts 50 for execution on the client 22 and scripts 42, and 44 for executing on the server. The web server 40 can be any suitable web server, as discussed above, and in this example, can be  
20   understood as the Apache web server listening to port 80 and having access to a set of executable files stored in a directory accessible to the web server 40 such as the cgi-bin directory. One such executable file may be a script that implements a the data record creation process for creating a data record for the merchant and for storing the data record in the database 12. The operation of one such script is depicted in Fig. 4. Another script may  
25   be invoked in response to a request from a client to access data, such as a set of phone numbers for a business traveler entering a certain location. The operation of such a script is depicted in Figure 5. Additional scripts, or other types of executable files may also be provided to implement a conventional, but optional, ad serving process that processes characteristics of a client request, such as the type of wireless device, any profile information  
30   provided, time of day, time of year, location and other such information to select an ad and telephone number, or a set of ads and telephone numbers, to deliver to the wireless device.

          The scripts may be Perl V scripts, C language programs or any other suitable programs. The design and development of the such scripts follows from principles known in  
35   the art of computer programming, including those set forth in Wall *et al.*, *Programming Perl*,

WO 00/69180

PCT/US00/12654

5 O'Reilly & Associates (1996); and Johnson *et al*, *Linux Application Development*, Addison-Wesley (1998). Additionally, in other embodiments, these processes may be implemented, at least in part, by employing the operating system to restrict the execution of certain scripts and to restrict access to certain files by configuring the operating system in a selected manner. Techniques for so configuring the operating system are known in the art, including those  
10 techniques set forth in Bach, *The Design of the Unix Operating System*, Prentice-Hall (1986).

Figure 3 depicts one process 60 for how a local merchant may employ the client system 20 to log on to the server 14, select a category for their goods and services and upload data and a phone number to be associated with that category for later deliver to a wireless  
15 device user.

Specifically Figure 3 depicts a process 60 that beings with step 62. In step 62 the local merchant uses a client to log into the server 14. Once logged in the process 60 proceeds to step 64 wherein the server 14 presents to the client 20 a web page that present different categories from which the local merchant may select. Such categories may include taxi  
20 services, airlines, hotels, florists, and other such information. Once the local merchant has selected a category, the process proceeds to step 68 wherein the form is completed including all information necessary for providing a phone number and identification information for that merchant. The form is submitted in step 68 and the form is transferred to the server 14. At server 14 the process 16 determines whether or not a record has already been created for  
25 the particular category of interest to the local merchant. If a record has not been created then the process 70 proceeds to step 72 wherein a record is created. A data record created may include information that is representative of the phone number provided by the local merchant, an identification for the phone number which may be shown in association with the phone number on the user display of the device 22 when the speed dial numbers are presented  
30 to the user, URL's of websites associated with the merchant, and any other information.

The process 60 may then proceed from step 72 to step 74 wherein a priority is created for the particular record. For example, in one embodiment the server 14 includes an ad server that present phone number and information for local merchants to wireless users that have  
35 requested service based in part on the fee paid by the local merchant to have their Returning

WO 00/69180

PCT/US00/12654

5 back to step 70 if a record has already been created for the category of interest, the process 70 proceeds to step 78 wherein a priority is determined for the information downloaded to the wireless users. Once the ad priority is set in step 74 the process 60 proceeds to step 80. As described above, in those applications wherein ad server is provided by the server 14, a priority for downloading an ad to a web device 22 may turn on factors such as the price paid  
10 by the local merchant for that ad. After step 78 the system proceeds to step 80 wherein the ad is provided to the ad server so that an ad server may present the add to a wireless device user. Once provided the process 60 terminates at step 82.

Turning now to Figure 4, one process is depicted for allowing a web server to create a  
15 local advertising package.

Specifically, Figure 4 depicts a process 90 wherein the server 14 detects a request from client. The request may be an HTTP request from the client wireless device such as the device 22, or maybe a request coming into the server 14 from the public switching telephone  
20 system. Upon receipt of the request, the process 90 proceeds to step 94 wherein the request is examined to determine the geographic area of the wireless device 22. In one embodiment, the request includes a standard HTTP header that may include geographic location information within the header. For example, in certain embodiments of the invention the cellular network, such as the cellular switch within the network may process HTTP requests from a  
25 wireless device to a web portal and include within the HTTP header information that is representative of the local area code for the cellular antenna servicing the wireless device. Alternatively, in other embodiments the user may be required to enter location information at the time of accessing the portal. In one embodiment, the server 14 provides to the wireless device 22 a series of maps that the user may manipulate to graphically select different  
30 portions of the map until that section of the map where the user is located is identified. Once this information is collected it may be forwarded to the web server for use by that server in selecting local advertisements, or any advertisements for the user.

Upon determining the area, the process 90 may proceed step 98 wherein the request is  
35 further processed to determine the type of phone, or other wireless device being employed by

WO 00/69180

PCT/US00/12654

5 the user. For example, the type of phone may be inserted by the wireless device when transmitting the HTTP header, or any other header being employed for carrying data from the wireless device to the server system. The phone type information may be employed by the server 14 for selecting the programming method for programming numbers into the speed dial memory of the wireless device. Optionally, the phone type may also be processed to  
10 determine whether the server 14 may correspond with the wireless device, or whether the server 14 may program the memory of the wireless device. The information representative of the phone type may also be employed by the server to determine whether or not graphical icons representative of banner ads stored by a local merchant in association with a phone  
15 number may be delivered to the wireless device for display on the screen of the wireless device. It will be apparent to those of ordinary skill in the art that other types of decisions may be made based on the type of wireless device that is communicating with the server systems described herein.

Once the phone type is determined the process 90 may proceed to step 100 wherein  
20 the server 14 determined whether a user profile is available for that user. In certain embodiments, the systems described herein employ profiling cookies, such as those provided by the Engage Corporation of Andover, Massachusetts, for collecting information about the interests of the user. Optionally in such an embodiment the systems described herein may employ the HTTP protocol for exchanging cookies between the client and the server.

25  
Once information about the wireless device platform and the user is obtained, the process 90 may employ an ad server, similar to the ad servers provided by the Adknowledge Corporation of California, USA, that may process characteristics of a user and their platform to determine a set of advertisements to present to that user. For example in Figure 4, the  
30 process 90 includes a step 102 wherein the ad server selects ads as a function of the request made by the user, the area, and the user profile. Accordingly, if the user makes a request to receive an ad package associated with a tourist ad package, the ad server may select tourist ads suitable for delivery to a user with the designated profile and in the designated geographic area.

WO 00/69180

PCT/US00/12654

5            Optionally, the ad server process may include a process for monitoring whether a client calls to a local merchant, and may maintain an accounting of the number of call  
throughs that each merchant gets. The server 38 may adjust the advertising rates, or the fee  
for supporting advertising based on these call throughs. In one practice, the server 38  
provides for a local merchant that has purchased ad space, a connection phone number that  
10 will be programmed into the client in association with the ad provided by the merchant.  
When the client dials that number the client may be connected back to the the branch 16, or  
any other branch that can track calls to merchants, and by employing the DNIS and caller ID,  
the server 38 can determine that a user called for a local merchant. The server 38 can then  
use the switch 16 to forward the user to the local merchant and can make an accounting of the  
15 fact that the merchant called.

In a further optional practice, the server 38 can provide to the wireless client one  
phone number to be called anytime the user wants to connect to any of the merchants  
downloaded by the server 38. In this practice, the number provided by the server connects  
20 the client 22 to the branch 16. In the same operation, the a script on the client 22 can transmit  
via the Internet 18, data indicating that the user is calling in to the server 38 for a particular  
local merchant. The server 38 can use the information provided over the Internet connection  
to connect the client to the proper merchant, and can, after the connection is made, or at  
another appropriate time, account for the call to the merchant by adjusting rates for  
25 advertising.

Proceeding to step 104 the process 90 may then select the delivery method for  
delivering information to the wireless device and select the programming method for  
programming information into the programmable memory of the wireless device. For  
30 example, in one practice the server 14 determines that the appropriate delivery message is to  
employ the HTTP protocol to deliver data and programming instructions, such as a WML  
script, through the Internet to the wireless device. Alternatively, the server may determine  
that an appropriate delivery method is to deliver programming information through the  
PSTN. Alternatively, combinations of both delivery methods may be employed. These two  
33 methods are graphically depicted in Figure 2 which shows that the wireless device 22 can

WO 00/69180

PCT/US00/12654

- 5 receive information, including content and programming instructions from either the LEC or the Internet 18. In one practice, the server 38 processes the request from the client to determine the type of client. The server 38 then selects the appropriate programming process for that device type. For example, the server 38 could transmit data and the script over the Internet, wherein the script will program the data memory of the wireless device.
- 10 Alternatively, the server 38 could determine that the user needs to call back to a number supported by the branch 16, and can employ a series of tones, including DMTF tones, to program the phone's memory.

- Additionally in step 104 the process 90 may determine the best process for
- 15 programming information into the programmable device. For example, in one embodiment a WML script is employed for running on a virtual machine supported by the wireless device. Employing a telephony application interface the wireless device may execute the script to have programmed into the devices memory the phone numbers being delivered from the server 14.

20

After step 104 the process may proceed to step 108 wherein the server delivers the local ad package to the cellular device wherein the local ad package may include content such as ad banners, name fields, phone numbers and scripts for programming and other applications.

25

Turning now to Figure 5 there is depicted a flow chart diagram representative of one process for allowing a user and a wireless device to call into a portal to have telephone numbers programmed into the programmable memory of the wireless cellular device.

- 30 Specifically Figure 5 depicts a process 120 wherein a wireless device user calls into a portal such as the WAP portal 14 depicted in Figure 1. In step 24 the user completes a form such as an HTML form, or WML form that has been presented by the server 14 to the wireless client. Upon completion of the form the user may submit the form for delivery through the Internet to the server. Proceeding to step 128, the process 120 will allow the user
- 35 of the wireless device to authorize the programming of any information into the

WO 00/69180

PCT/US00/12654

5 programmable memory of the device. For example, the server may deliver a set of phone numbers and an executable script to the wireless device for programming the memory of the wireless device. Optionally, the client device may include a browser that requires the user to authorize, or verify their identity, before the programming may take place. In one practice, the process 120 may require in step 128 that the user enter a password known by the wireless  
10 device for allowing the system to be programmed. Alternatively, the wireless device may include a browser that requires a biometric authorization such as signature by a smartpen, such as the type described by LCI Technologies Company of the Netherlands. In either case once authorized, the programming may take place and the process 120 proceeds to step 130 wherein a user may view the new phone numbers programmed into their memory as well as  
15 advertisements associated with those new phone numbers.

Although Fig. 2 graphically depicts the server 14 as functional block elements, it will be apparent to one of ordinary skill in the art that these elements can be realized as computer programs or portions of computer programs that are capable of running on the  
20 data processor platform 12 to thereby configure the data processor 12 as a system according to the invention.

Additionally, as discussed above, the local advertising systems can be realized as a software components operating on a conventional data processing system such as a Unix  
25 workstation. In that embodiment, the local advertising mechanisms may be implemented as a C language computer program, or a computer program written in any high level language including C++ , Fortran, Java or basic. Additionally, in an embodiment where microcontrollers or DSPs are employed such as if the systems are deployed as part of a cellular switch, the systems can be realized as a computer program written in microcode or  
30 written in a high level language and compiled down to microcode that can be executed on the platform employed. The development of such systems is known to those of skill in the art, and such techniques are set forth in Digital Signal Processing Applications with the TMS320 Family, Volumes I, II, and III, Texas Instruments (1990). Additionally, general techniques for high level programming are known, and set forth in, for example, Stephen

WO 00/69180

PCT/US00/12654

- 5 G. Kochan, *Programming in C*, Hayden Publishing (1983); and See *The C++ Programming Language*, 2nd Ed., Stroustrup Addison-Wesley. It is noted that DSPs are particularly suited for implementing signal processing functions, including preprocessing functions such as image enhancement through adjustments in contrast, edge definition and brightness. Developing code for the DSP and microcontroller systems follows from principles well
- 10 known in the art.

- Those skilled in the art will know or be able to ascertain using no more than routine experimentation, many equivalents to the embodiments and practices described herein. Additionally, additions may be made without departing from the scope of the invention.
- 15 Accordingly, it will be understood that the invention is not to be limited to the embodiments disclosed herein, but is to be understood from the following claims, which are to be interpreted as broadly as allowed under the law.



WO 00/69180

PCT/US00/12654

5

I claim:

1. A system for allowing advertising over a wireless network, comprising
  - 10 a wireless device having a programmable memory for storing telephone numbers,  
  
a web site portal having a database for storing a plurality of data records each data record having storage for a telephone number and each data record being associated with  
15 a category of goods or services and having an interface for allowing a company to select one of the categories of good or service and to upload to the data record associated with the selected category a phone number and a data message for storage in the associated data record, and  
  
20 a computer process for allowing the programmable wireless device to request data from the web site portal and, in response to the request, selecting at least one of the categories of goods or services, and programming a phone number into the programmable memory of the wireless device for allowing the wireless device to call for the selected category of goods or services.
- 25 2. The system of claim 1, further including means for delivering to the wireless device a program for programming the number into the programmable memory.
3. The system of claim 1, wherein the computer process includes means for programming  
30 the phone number associated with the ad into the programmable memory.
4. The system of claim 1, wherein the computer process includes means for programming a phone number associated with a central telephony server into the programmable memory.

WO 00/69180

PCT/US00/12654

- 5     5. The system of claim 1, wherein the web site portal includes a server for allowing the company to upload a banner ad for being stored in association with the phone number.
6. The system of claim 5, further comprising a resizing process for processing the banner ad to resize the ad for presentation on the wireless device.
- 10     7. The system of claim 1, further including means for collecting location information associated with the wireless device and for processing the location information for selecting a phone number.
- 15     8. The system of claim 1, wherein the wireless device includes a virtual machine and the program includes a script capable of running on the virtual machine.
9. The system of claim 8, wherein the script includes a WMLscript compatible script.
- 20     10. The system of claim 8, wherein the script includes a security mechanism requiring user authorization before programming the wireless device number into the programmable memory.
11. The system of claim 10, wherein the security mechanism includes a password.
- 25     12. The system of claim 10, wherein the security mechanism includes a biometric passkey.
13. The system of claim 1, further including an interface for communicating with a user client system, wherein a user can select ads for delivery to the wireless device.
- 30     14. The system of claim 1, wherein the data record includes storage for data selected from the group consisting of urls, geographic addresses, schedules or directions.
15. The system of claim 1, wherein ads are presented in packages associated with a theme.
- 35

WO 00/69180

PCT/US00/12654

5 16. The system of claim 15, wherein ads are presented in packages selected from the group of themes consisting of tourism, business, new resident, or shopping for specific goods.

17. A process for allowing advertising over a wireless network, comprising

10 providing a wireless device having a programmable memory for storing telephone numbers,

providing a web site portal having a database for storing a plurality of data records each data record having storage for a telephone number and each data record being  
15 associated with a category of goods or services and having an interface for allowing a company to select one of the categories of good or service and to upload to the data record associated with the selected category a phone number and a data message for storage in the associated data record, and


20 allowing the programmable wireless device to request data from the web site portal and, in response to the request, selecting at least one of the categories of goods or services, and programming a phone number into the programmable memory of the wireless device for allowing the wireless device to call for the selected category of goods or services.

25

30


WO 00/69180

PCT/US00/12654

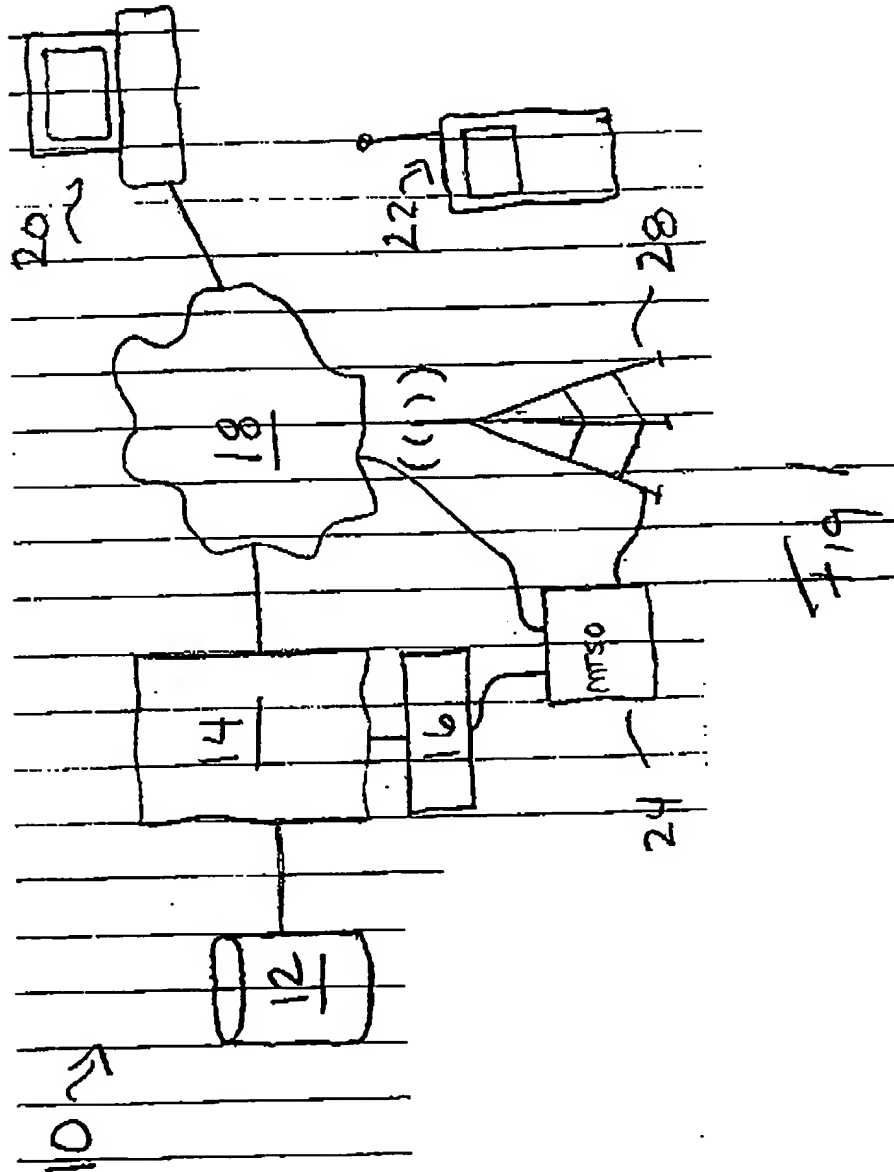


WO 00/69180

PCT/US00/12654

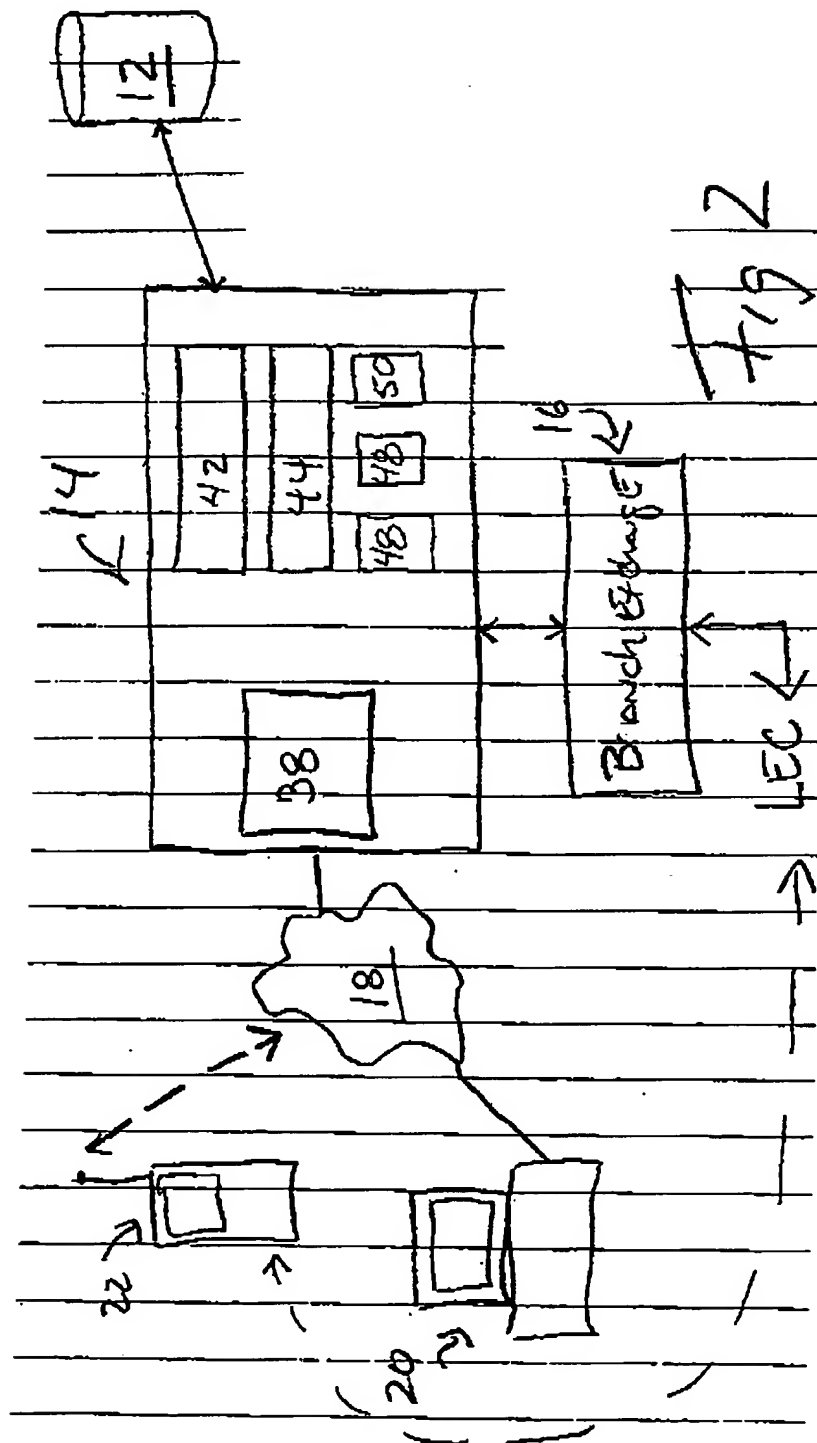


WO 00/69180

PCT/US00/12634

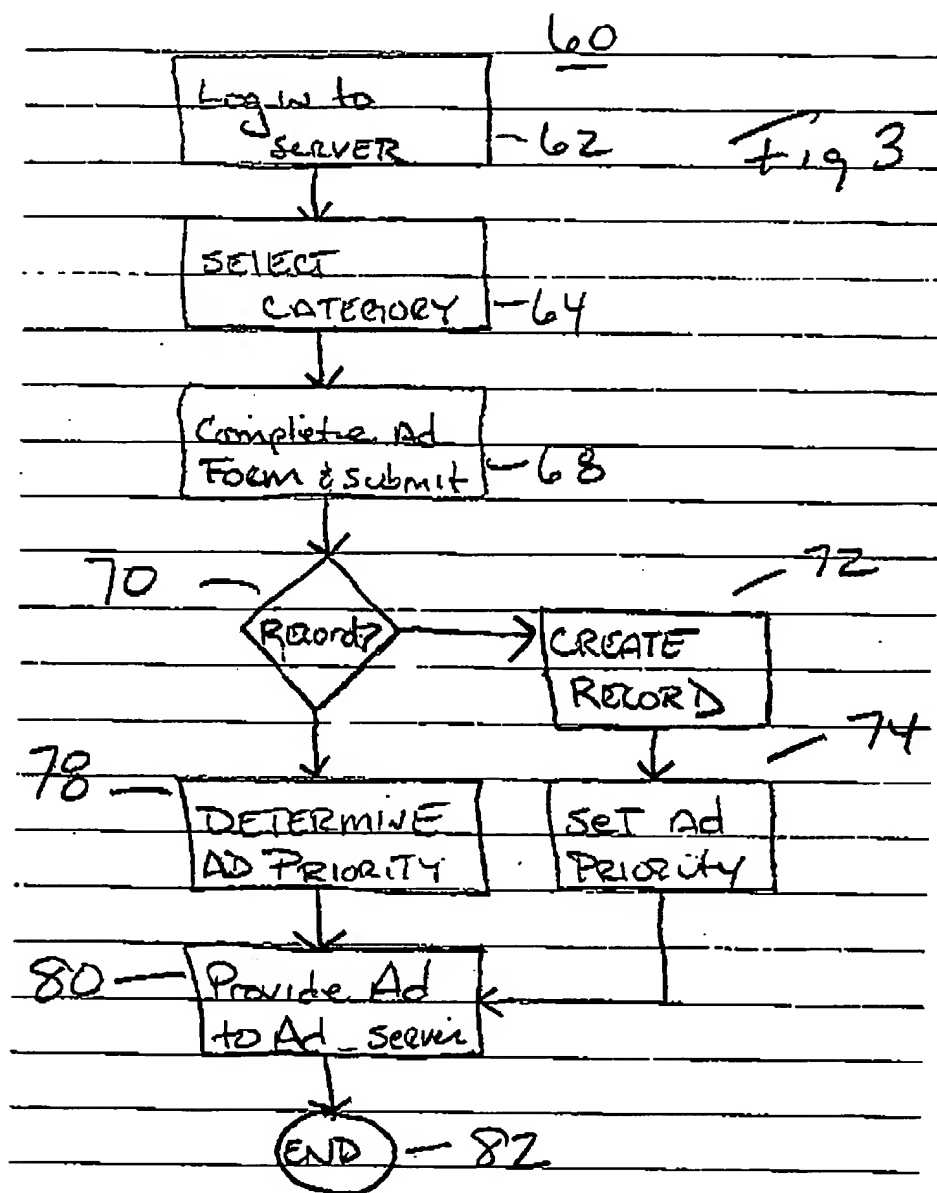


WO 00/69180

PCT/US00/12634

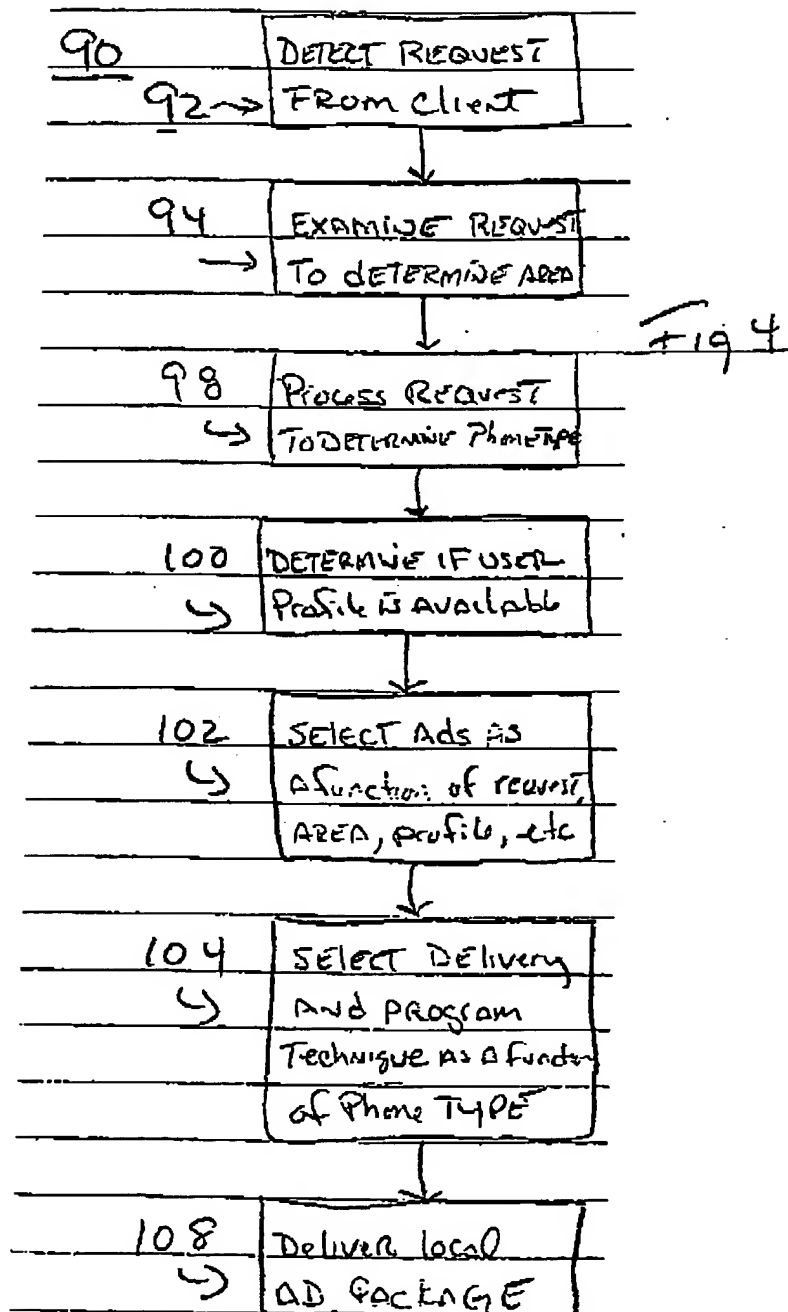

WO 00/69180

PCT/US00/12654

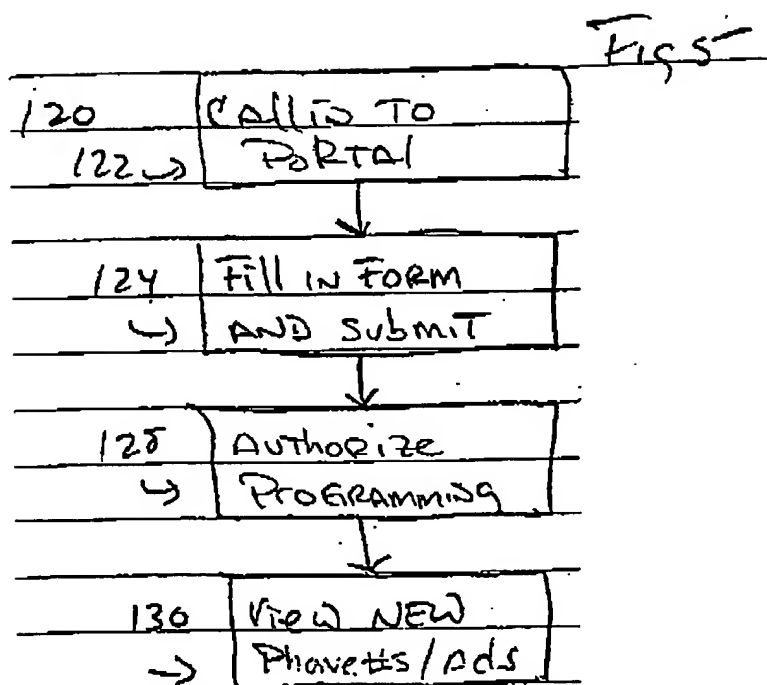



**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☐ LINES OR MARKS ON ORIGINAL DOCUMENT

☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**